


# FILASTONE PLUS

## PENETRATING STONE ENHANCER



- POLISHED  
NATURAL STONES  
AND AGGLOMERATES
- UNPOLISHED NATURAL  
STONES AND  
AGGLOMERATES

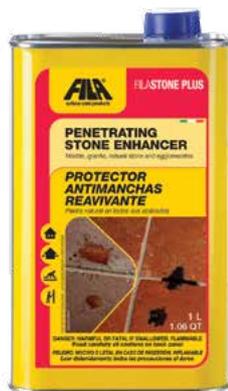

### WHAT IT'S FOR

- Protects and enriches the original color of polished, honed, rough and tumbled natural stone.
- Penetrates deeply into the material, protecting it from water and oily stains and dirt.
- Ideal for tops, inlays and backsplashes.
- Perfect for both interior and exterior surfaces.

### ADVANTAGES

- Intensifies color whatever the surface finish.
- For interior and exterior surfaces.
- Non-yellowing, UV resistant, provides long-lasting protection.
- Very high coverage rates.
- Hides any fissures in granite.
- Non film forming.
- Certified as safe for food preparation areas

### HOW IT'S USED

**No dilution:** ready to use

**Application:**

1. Using a paintbrush, apply FILASTONEPLUS to a clean, dry surface.
2. During the application rub the surface with a sponge or a cloth to help the penetration of the product and the removal of any excess.
3. The surface can be walked on after only eight hours.
4. For a deeper color, repeat procedure, waiting at least 8 hours between each application.

**Maintenance:**

diluted solution of FILACLEANER.

**Caution:**

Enhancement with FILASTONEPLUS is almost irreversible, please perform a preliminary spot test. On some external materials, we advice to re-apply the product every year to maintain the color enhancing effect. It does not protect marble and limestone from acid. Do not apply the product externally if rain is forecast.

#### COVERAGE

With one litre (1,06 QT):

Polished stone	50 m <sup>2</sup> (538 sq ft)
Rustic stone	20/25 m <sup>2</sup> (215/270 sq ft)

"Coverage rates are approximate and refer to a single coat of the product"

### Packaging

250 ml (8.5 fl oz) cans in box of 12.  
1 liter (1.06 qt) flasks in box of 12.

#### PRECAUTIONS

- Keep out of the reach of children.
- Dispose of the container properly after use.
- Solvent based: when used indoors, ventilate premises thoroughly. Keep in a cool, dry place.
- Don't apply the product if it could rain within 8 hours.

#### TEMPERATURE

**Storage temperature:**  
between 32° F (0° C) and 86° F (30° C).  
Must be applied to material at temperatures between 41° F (5° C) and 86° F (30° C).

#### LABELLING

DANGER! HARMFUL OR FATAL IF SWALLOWED.  
FLAMMABLE.

Contains petroleum distillates. Avoid frequent or prolonged contact with skin. Do not use near heat or open flame. If swallowed, call a poison control center, physician or emergency room immediately. Keep out of reach of children.

#### TECHNICAL INFORMATION

**Appearance:** liquid  
**Color:** colorless  
**Odour:** slight odour of hydrocarbon solvent  
**Density:** 0.874 kg/litre  
**Flash point:** 104° F

The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check. Fila accepts no liability for improper use of its products.